

**SNAPPY**

# LED POWER SUPPLY DATASHEET

## SE150-12VL

### ·DESCRIPTION

High Cost Performance, SELV. Short circuit, open circuit, overload and over temperature protection. Compliance to ERP directive, lifetime 30,000hrs.



### ·Input

Items	Conditions	Request	Note
Input voltage	Ta	198-264Vac	--
Input frequency		50/60Hz	--
Input current	25°C, rated input voltage, output with max. rated power	< 1A	--
Input power		< 150W	--
Efficiency		≥ 90%	--
Standby		25°C, rated input voltage, output without load	<0.5W
Inrush current	25°C, rated input voltage	<75A	peak
PF	25°C, rated input voltage, output max. rated power	≥ 0.9	--

### ·Temperate and others

Items	Conditions	Request	Note
Operation temp.	--	-20-45°C	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	90°C	--
Lifetime	Max.Ta,rated input voltage,output with max.rated power	30,000hr	--
Working noise	25°C,rated input voltage,output with rated power, mute box background noise<35dB, pickup 10cm distance from products	Yes	--

### ·Protection

Item	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta, 0.94-1.06 times of input voltage, 1.5 times of rated power	Yes	--
Short circuit	Ta, 0.94-1.06 times of input voltage	Yes	--
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 115 degree	Yes	--
Over voltage	Ta, 0.94-1.06 times of input voltage,output voltage is 1.5 times of rated one	Yes	--
Auto recovery	Over load、short circuit、Over temperature revocation	Yes	--
Latch off	Over voltage re-start after cut off	Yes	--

### ·Output

Items	Conditions	Request	Note
Startup time	25°C, rated input voltage, output with max. rated power	<0.5S	--
Output voltage and precision	Ta, rated input voltage, output with rated power	12V±5%	--
Output current range	Ta ,rated input voltage	0-11A	
Output voltage wave	25°C, rated input voltage, output with max. rated power	300mV	Vp-p
Output overload	25°C,rated input voltage, output with twice LED load	Yes	--
Output current and precision	Ta , rated input voltage, output with rated power	--	--
Rated output voltage range	Ta , rated input voltage	--	--
Output current wave	25°C, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	--	--	--
Dimming range	--	--	--

### ·Mechanical, mounting



Items	Conditions
Case material and size	Plastic L179.4*W62.5*H30.6mm
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	H03VVH2-F 2X0.75mm <sup>2</sup>
Output cables dimension	H05VVH2-F 2X1.0mm <sup>2</sup>
Output cables length	Max 2M

### ·Standard

Items	Conditions
Safety	IEC61347-1、IEC61347-2-13
Harmonic	EN61000-3-2 Class C
EMI	EN55015
EMS	EN61000-4-2、3、4、5、6 EN61547



● **Dimensions(mm)**

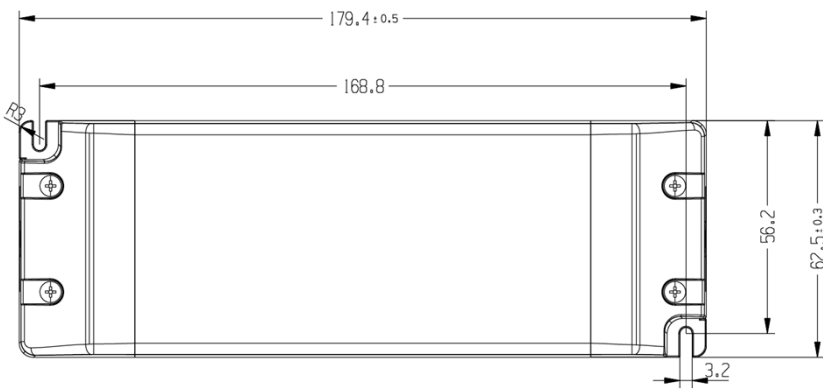

● **Wiring Diagram**

