
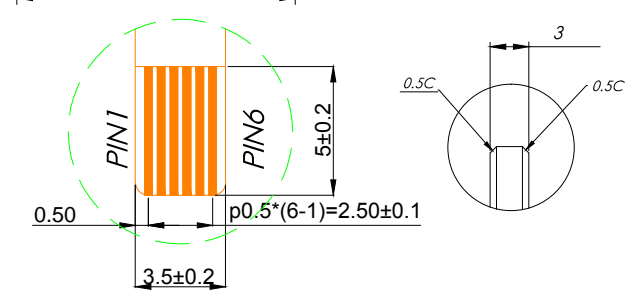
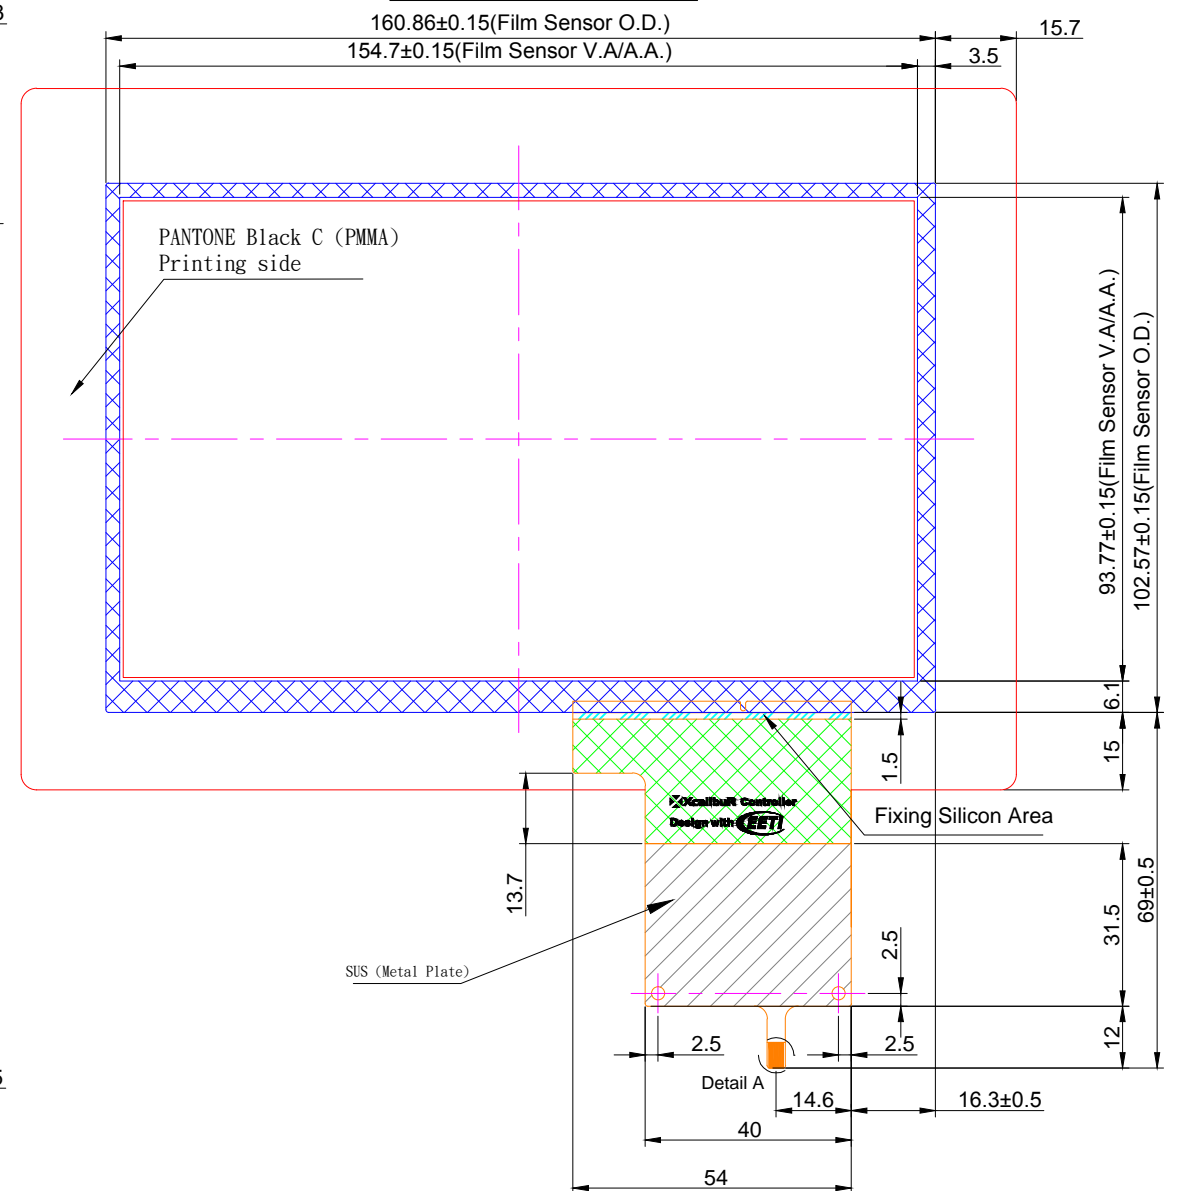
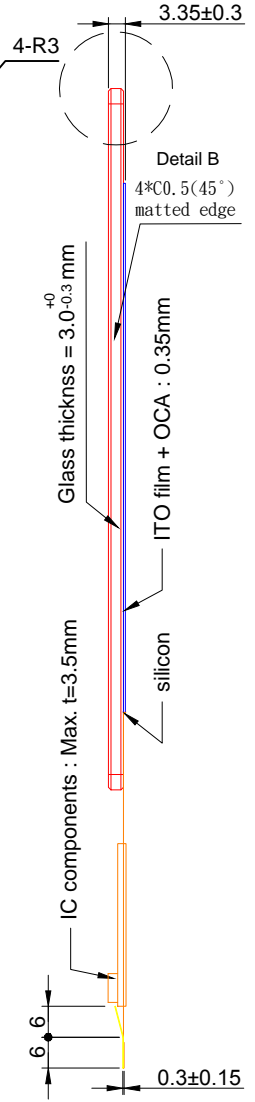


Front VIEW

Back VIEW

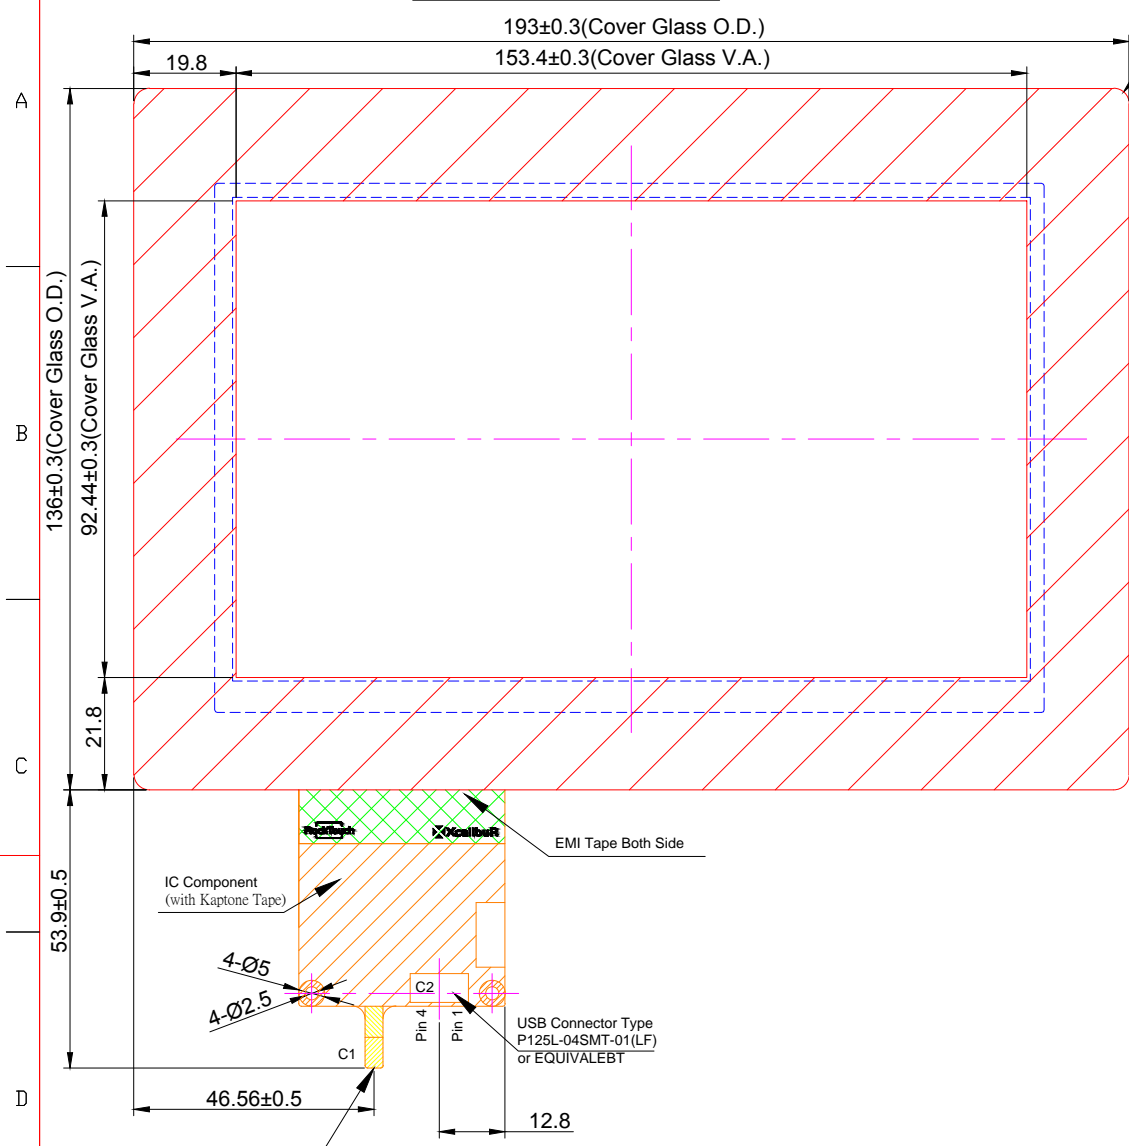

Printing Info :
 Background Printing Type : PMMA CERAMIC 700°C Background Color : Pantone Black C
 Logo Printing Type : PMMA Logo Color :

- Note:
- To choose the interface just add at the end of the part number the following : - U for USB - I for I2C
 - Tolerance: ±0.3mm
 - Finger input only or special conductive pen
 - Surface Hardness: 6H (Semi-Tempered Glass)
 - Transmittance: >85% (JIS-K7105)
 - Surface Treatment: none
 - Distance between LCD and touch panel need to be minimum 1.0mm otherwise touch maybe will not work correctly
 - If customer put a front cover all around need use at least 2mm thick gasket between touch and metal frame
 - USB max ripple acceptable is 50mV, in other case touch will not work correctly
 - Referring to the integration guide to avoid any integration noise issue

C1:USB (OPTIONAL)	
Pin 01	VDD
Pin 02	D-
Pin 03	D+
Pin 04	GND
Pin 05	RST
Pin 06	NC

C1:I2C (OPTIONAL)	
Pin 01	VDD
Pin 02	SDA
Pin 03	SCL
Pin 04	GND
Pin 05	RST
Pin 06	INT

C2:Pin Define for USB 4 pin	
Pin 01	GND
Pin 02	D-
Pin 03	D+
Pin 04	VDD

圖號 RTPC070W-X30BP1



02	20151020	Kevin	Jeff	Correcting T/P V.A. dimension
版	年月日	設計	審查	變更內容
設計	2015/07/08	Johnny	審查	Kevin 承認

日期 原圖 管理 元