

## Line Scan Camera


### L5022MG141E

#### Product Features

- Support brightness enhancement, gamma correction, LUT and other ISP functions;
- Support PRNU correction in target bright field;
- Support various image formats of output data;
- Support DC12~24V wide-range power supply;
- Conform to CE, FCC, UL, RoHS certifications;



#### Dimensions (mm)

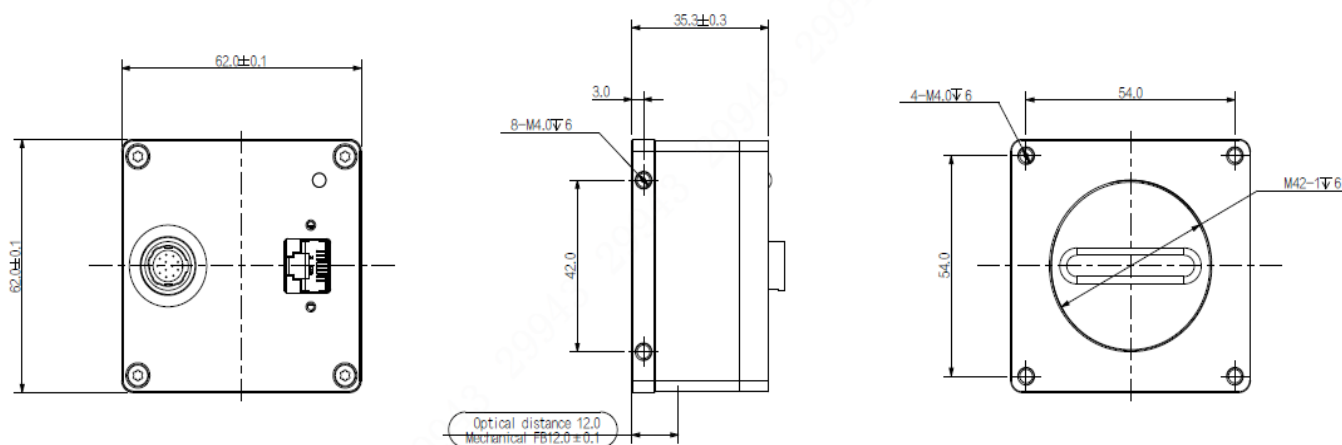

## Technical Specifications

Model Name	L5022MG141E
Sensor	2K
Sensor Type	CMOS
Resolution	2048 x 1
Line Rate	49K
Bit Depth	12
Mono/Color	Mono
Pixel Size	14 x 14
S/N Ratio	>38dB
WDR	66dB
Image Format	Mono8/10/12/10Packed/12Packed
ROI	Support
X-axis Flip	Support
Gain	1~32
Gamma	From 0 ~ 4, support LUT
Exposure Time	8 $\mu$ S~100ms
Sync Mode	Software Trigger/Hardware Trigger/Free Run Mode
FPN	Support
User Setting	Support two sets of user-defined configurations
Cache	64MB image cache, 64MB data cache
Port	GigE
GPIO	2 differential input, 2 single-end input, 1 differential output and 1 GPIO
Lens Mount	M42 x 1
Power Supply	DC12~24V power supply via 12-pin Hirose connector
Power Consumption	12V $\approx$ 4.5W
Product Dimensions	62mm*62mm*35.3mm(Not including rear case connector)
Weight	245g
Working Environment	Storage: - 30°C~+80°C; Operation: - 30°C~+50°C

© 2021 IRAYPLE. All rights reserved. Design and specifications are subject to change without notice.  
Pictures in the document are for reference only, and the actual product shall prevail.