

NINGBO SNAPPY OPTOELECTRONICS CO.,LTD SDL60-VF



Features:

- .Built-in constant voltage LED driver
- .Built in push dimming
- .Comply to DALI 2.0 standard(IEC 62386-101,102,207)
- .Linear or log curve optional
- .Dimming range 1.0-100%
- .Open circuit, short circuit, overload, over temperature protection
- .Efficiency more than 88%
- .For indoor lighting,office lighting
- .5 years warranty

Model		SDL60-VF	
Output	VOLTAGE RANGE	12VDC	24VDC
	RATED CURRENT	5A MAX	2.5A MAX
	MAX OUTPUT POWER	60W	
	SETUP TIME	<0.6 sec. @230VAC	
	Dimming range	1.0-100%	
Input	Input mode	DALI OR PUSH DIMMING	
	VOLTAGE RANGE	220-240VAC 290-360VDC	
	INPUT POWER	<75W	
	Input current	0.45 A MAX	
	Inrush current	50A MAX	
Protection	OVER CURRENT	110-180%	
	OVER VOLTAGE	18VDC MAX	36VDC MAX
	OVER TEMPERATURE	Thermal lock	
	SHORT CIRCUIT	Hiccup mode auto-recovery	
Environment	WORKING TEMP.	-40~45℃	
	WORKING HUMIDITY	15~95% RH	
	STORAGE TEMP., HUMIDITY	-40~85℃,10~95% RH	
	TEMP. COEFFICIENT	±0.05%/℃(-10~45℃)	
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle,30 min. each along X, Y, Z axes	
Safety&EMC	SAFETY STANDARDS	EN61347-1,EN61347-2-13	
	DALI STANDARDS	comply to DALI 2.0 standard(IEC 62386-101,102,207)	
	WITHSTAND VOLTAGE	I/P:-O/P:5.3KVDC 1mins	
	ISOLATION RESISTANCE	I/P:-O/P:50M Ohm/500VDC/25℃/70%RH	
	HARMONIC	comply to EN61000-3-2 CLASS C (100% load)	
	EMC EMISSION	comply to EN55015,FCC PART15 ClassB	
	EMC IMMUNITY	comply to EN61000-4-2、3、4、5、6、8、11; EN55024; EN61547	
Others	MTBF	5 years MIL-HDBK-217F (45℃)	
	DIMENSION	361.5x30x21.3mm	
	PACKING	as customer request	

■ Dimming operation

Push dimming

Function	Push time
No status change	<0.05 sec.
Push on/off	0.1-1 sec.
Dimming up or down	1.5-10 sec.
Long press in the off state, dimming starts from the minimum value	>1sec
Set 100% brightness	>11sec.

Factory setting 100%

Each time press will change the dimming direction

■ Dimming connection diagram

The DALI wiring diagram




The PUSH dimming wiring diagram



Please select the suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation

Dimensions

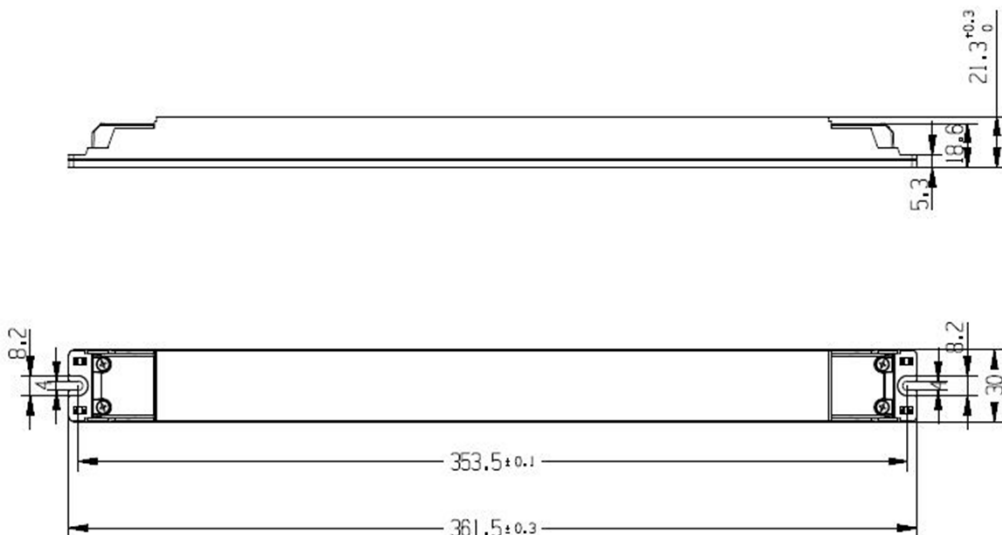

Pin function description

Functions	Description
DA	DA signal/AC Null Wire
DA	DA signal/connect it between AC Live Wire and swi
AC/N	AC Null Wire
AC/L	AC Live Wire
Vout+	Positive polarity
Vout-	Negative polarity